


MODEL 1020 and 1030E

Universal Chassis System Standalone Enclosures

The EdgeAccess® 1020 and 1030E are one slot enclosures designed for Canoga Perkins 2U sized Fiber Optic Modems, LAN Media Converters and Ethernet Service Units. The Model 1020 includes RS-232 and Ethernet Management Ports providing management access to the installed Modem, Media Converter or Ethernet Service Unit.

Network operators can gain management information via Telnet, PPP, VT100 terminal access, or modem. Switches for connector configuration, local and remote loopback and LEDs are located in the front for easy access.

The Model 1030E is the non-managed companion to the Model 1020 Managed Enclosure. It is a cost effective alternative to the Model 1020 when local management access is undesirable or the application does not require local management access. The Model 1020 and 1030E holds one fully manageable or limited management 2U module. The 1030E is available with AC and 48 VDC power. The 1020 supports AC power only.

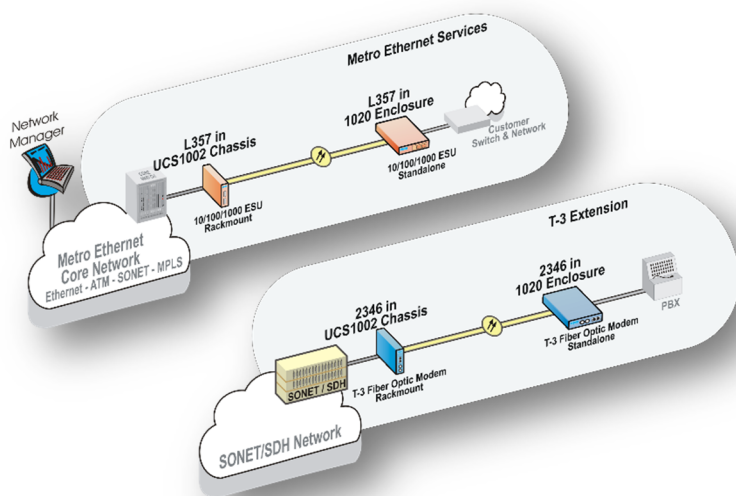

FEATURES:

- **Local Management**
- **10BaseT and EIA 232 Local Management Ports (1020 only)**
- **Cost-Effective Entry Price**
- **Modularity for Flexibility and Reduced Cost of Ownership**
- **Hot-swappable Modules**
- **AC and 48 VDC Power – Internal Power Supply – No External Power Cube!**
- **Adjustable Rack Mounting Options With Three Positions**
- **SNMP Management Interface (1020)**
- **Menu Driven Telnet and Craft Port Management Interfaces (1020)**
- **Houses a Single 2U Module**



World Headquarters


20600 Prairie Street, Chatsworth, CA 91311-6008
Phone (818) 718-6300 • Fax (818) 718-6312 • www.canoga.com

MODEL 1020 and 1030E


Universal Chassis System Standalone Enclosures

Specifications

- **PHYSICAL**
 - Dimensions
1.5"H x 6.25"W x 10.0"L
(38.1mm x 159mm x 254mm)
 - Weight
3.0 lbs (1.4kg)
- **OPERATING ENVIRONMENT**
 - 0° to +50°C (32° to 122° F)
 - 10% to 90% RH (non-condensing)
- **POWER**
 - AC Power Supply – Models 1020 and 1030E
100 VAC to 240 VAC, 50/60 Hz
Auto Ranging, 10W Max.
 - DC Power Supply – Model 1030E Only
36 VDC to 72 VDC, 10W Max.
- **FRONT PANEL SWITCHES - Model 1020 Only**
 - MDM/TRM DCE – DTE Operation
 - F1/NRM/F2 Loopback Operation
 - HDX/FDX Half/Full Duplex -10Base-T
- **CONNECTORS**
 - 10Base-T Ethernet Management
 - EIA-232 RS-232 Management
- **DIAGNOSTIC LEDs – Model 1020 Only**
 - PWR Power Status
 - Tx 10Base-T Transmit Activity
 - LNK/Rx 10Base-T Status & Receive Activity
- **REGULATORY COMPLIANCE**
 - ETL, ETLc (UL 60950 CAN/CSA C.22 No. 60950, EN/IEC 60950)
 - IEC 60825-1
 - FCC Part 15B/ICES-003/VCCI Class A
 - C-Tick (AS/NZS 3548)
 - EN 55022 Class A, EN 55024
 - EN 61000-3-2, EN 61000-3-3

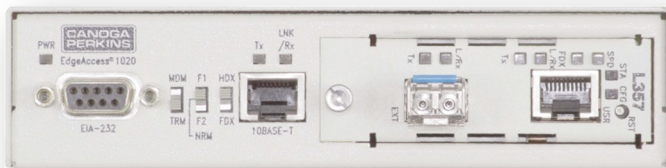

*Model 1020
(with L357 1G Ethernet Service Unit)*

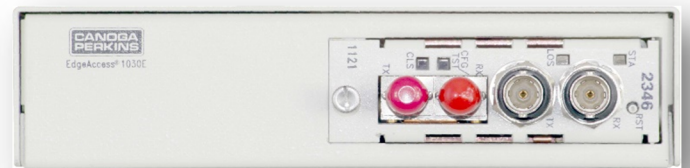

*Model 1030E
(with 2346 T-3 Fiber Optic Modem)*

World Headquarters

20600 Prairie Street
Chatsworth, CA 91311-6008
Phone (818) 718-6300 • Fax (818) 718-6312
www.canoga.com



60530700

Specifications are subject to change without notice. All trademarks, service marks, and logos ("Marks") is property of respective owners. © Canoga Perkins Corporation 2016. All rights reserved.