

MODEL 2370

High Speed Fiber Optic Modem

For all branches of the Military, Government agencies, commercial and government system integrators, public and private network administrators who need to extend standards based serial data over fiber optic cable, the Canoga Perkins Model 2370 High Speed Fiber Optic Modem combines SNMP management with versatile and cost effective solutions for all your commercial and C4I asset applications.

The 2370 offers all the functionality you expect. It operates asynchronously at speeds up to 15 Mbps and synchronously at speeds up to 20Mbps. Clocking options include external, internal, and slave timing. Using a built in clock synthesizer, the 2370 Fiber Optic Modem generates dozens of commonly used clock rates. These include all Nx56 Kbps and Nx64 Kbps clock rates.

Modular in design, the 2370 High Speed Fiber Optic Modem supports hot swappable, field installable electrical interfaces. For applications requiring protocol handshaking, end-to-end transport of control leads are supported. Multimode, single mode, Single Fiber BiDi and CWDM optics are available to meet your implementation needs.

Configuration and modem management is accomplished locally with the built-in RS-232 async terminal port or remotely using our advanced SideBand Management technology. Our multi-technology Universal Chassis System (UCS) Domain Manager provides user-friendly menus for end-to-end, non-intrusive, unit configuration status, and control. Remote access is available by using an external modem connected to the 2370 terminal port or through SNMP.

The Model 2370 High Speed Fiber Optic Modem is fully redundant providing hardware and fiber protection for mission critical applications. The software selectable redundancy feature allows one pair to function as a primary link while another pair of 2370s act as a secondary link. This creates a completely redundant connectivity for maximum uptime and circuit availability.



World Headquarters

20600 Prairie Street, Chatsworth, CA 91311-6008

Phone (818) 718-6300 • Fax (818) 718-6312 • www.canoga.com



FEATURES:

- **Optical Long Distance Extension of Clock and Data Circuits up to 120 Km**
- **Standalone, 19" and 23" Rack Mount**
- **Field Interchangeable, Hot Swappable Interfaces**
- **Internal, External, and Slave Clocking Modes Provided**
- **Local and Remote Loopback Diagnostics**
- **Multimode, Single Mode, BiDi and CWDM Optics to Match Virtually Any Application**
- **Supports KIV and KG encryption product lines**
- **Full Optical and Hardware Redundancy for Maximum Uptime**
- **End-To-End SideBand Management for Remote Management and Monitoring**
- **Continuous, Non-intrusive BERT to Monitor Optical Link Performance**
- **Local and Remote Terminal Port, PPP, Telnet and SNMP Management**
- **NEBS Level 3 Tested and Certified**

MODEL 2370

High Speed Fiber Optic Modem

Specifications

- **PHYSICAL**

Module Dimensions

7.9" H x 1.0" W x 10.5" D
(201mm x 25mm x 267mm)

Weight

1.2 lb (0.54kg)

- **ENCLOSURES**

Rackmount

UCS 1000

UCS 1001

Standalone

Model 1040

Model 1050

- **OPERATING ENVIRONMENT**

Standard Models

0° to +50°C (32° to 122° F)

10% to 90% RH (non-condensing)

- **POWER**

9.5w Max

- **INTERFACE CONNECTORS**

Extension Port (Fiber)

SC

ST

Data Port

DB-25

RS-232, RS-423, RS-530,
V.35

DC-37

RS-449

DA-15

T-1, E-1

RJ-48c

T-1, E-1

BNC

TTL

Twin Ax

Mil-188, RS-422

- **DATA RATES**

Async

50 bps to 15 Mbps

Sync

50 bps to 20 Mbps

- **FRONT PANEL SWITCHES**

RST

Modem and Management Reset

MDM/TRM

DTE – DCE Operation

- **MANAGEMENT**


SNMPv1, SNMPv2c and SNMPv3, In-band
Serial EIA-232-E Direct Terminal
Telnet, PPP

- **DIAGNOSTIC LEDs**

STA System Status
CFG Modem Configuration Error
CLS Loss of Optical Signal
TST Test/Loopback Status

- **OPTICAL DISTANCES**

2370 Optics

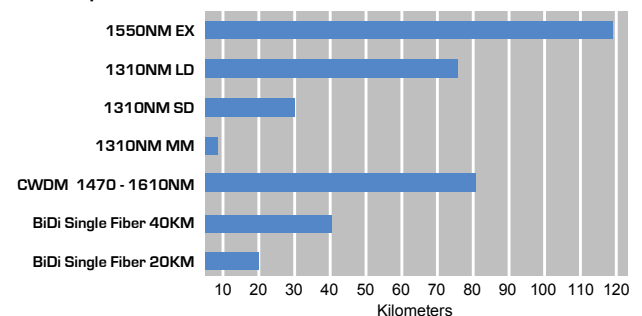

These are typical distances on SMF-26 fiber. Actual distance is dependant on fiber type, condition and configuration.

Please contact your Canoga Perkins' sales representative for current Fixed and SFP Optics offerings.

- **REGULATORY COMPLIANCE**

ETL, ETLc (UL 60950 CAN/CSA C.22 No. 60950,
EN/IEC 60950)

IEC 60825-1

FCC Part 15B/ICES-003/VCCI Class A

C-Tick (AS/NZS 3548)

EN 55022 Class A, EN 55024

EN 61000-3-2, EN 61000-3-3

NEBS Level 3

World Headquarters

20600 Prairie Street

Chatsworth, CA 91311-6008

Phone (818) 718-6300 • Fax (818) 718-6312

www.canoga.com



6053151B